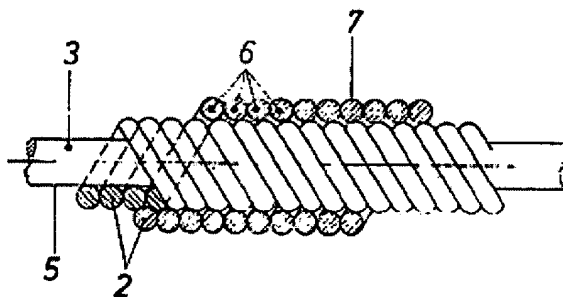


B6

Elastomer-coated multi-wire spring**Publication number:** CH637739**Publication date:** 1983-08-15**Inventor:** ROEHRS WERNER DR (DE)**Applicant:** ROEHRS WERNER DR KG (DE)**Classification:****- international:** *F16F1/366*; *F16F1/36*; (IPC1-7): F16F1/06; F41D11/12; F41F17/16**- european:** F16F1/02D; F16F1/366; F16F3/06**Application number:** CH19780008989 19780826**Priority number(s):** CH19780008989 19780826[Report a data error here](#)**Abstract of CH637739**

The elastomer-coated multi-wire spring is preferably used in automatic-weapon construction. In order to increase the life of such a multi-wire spring, which is guided on a pin or in a sleeve, the core wire (3) and the internal wires are coated with highly elastic elastomers (5), while the external wires (6) are coated with elastomers (7) which are wear-resistant and are resistant to chemical influences.

Data supplied from the **esp@cenet** database - Worldwide